

# **Information Filtering for arXiv.org:**

## **A Markov Decision Process Analysis of the Cold Start problem**

Xiaoting Zhao, Peter Frazier  
School of Operations Research & Information Engineering  
Cornell University

---


INFORMS Computing Society Conference, Richmond VA  
January 12, 2015  
Funded by NSF and AFOSR



We are interested in

# information filtering

- ❖ We face a sequence of time-sensitive items (emails, blog posts, news articles).
- ❖ A human is interested in some of these items.
- ❖ But, the stream is too voluminous for her/him to look at all of them.
- ❖ **Our goal:** design an algorithm that can learn which items are relevant, and forward only these items to the user.

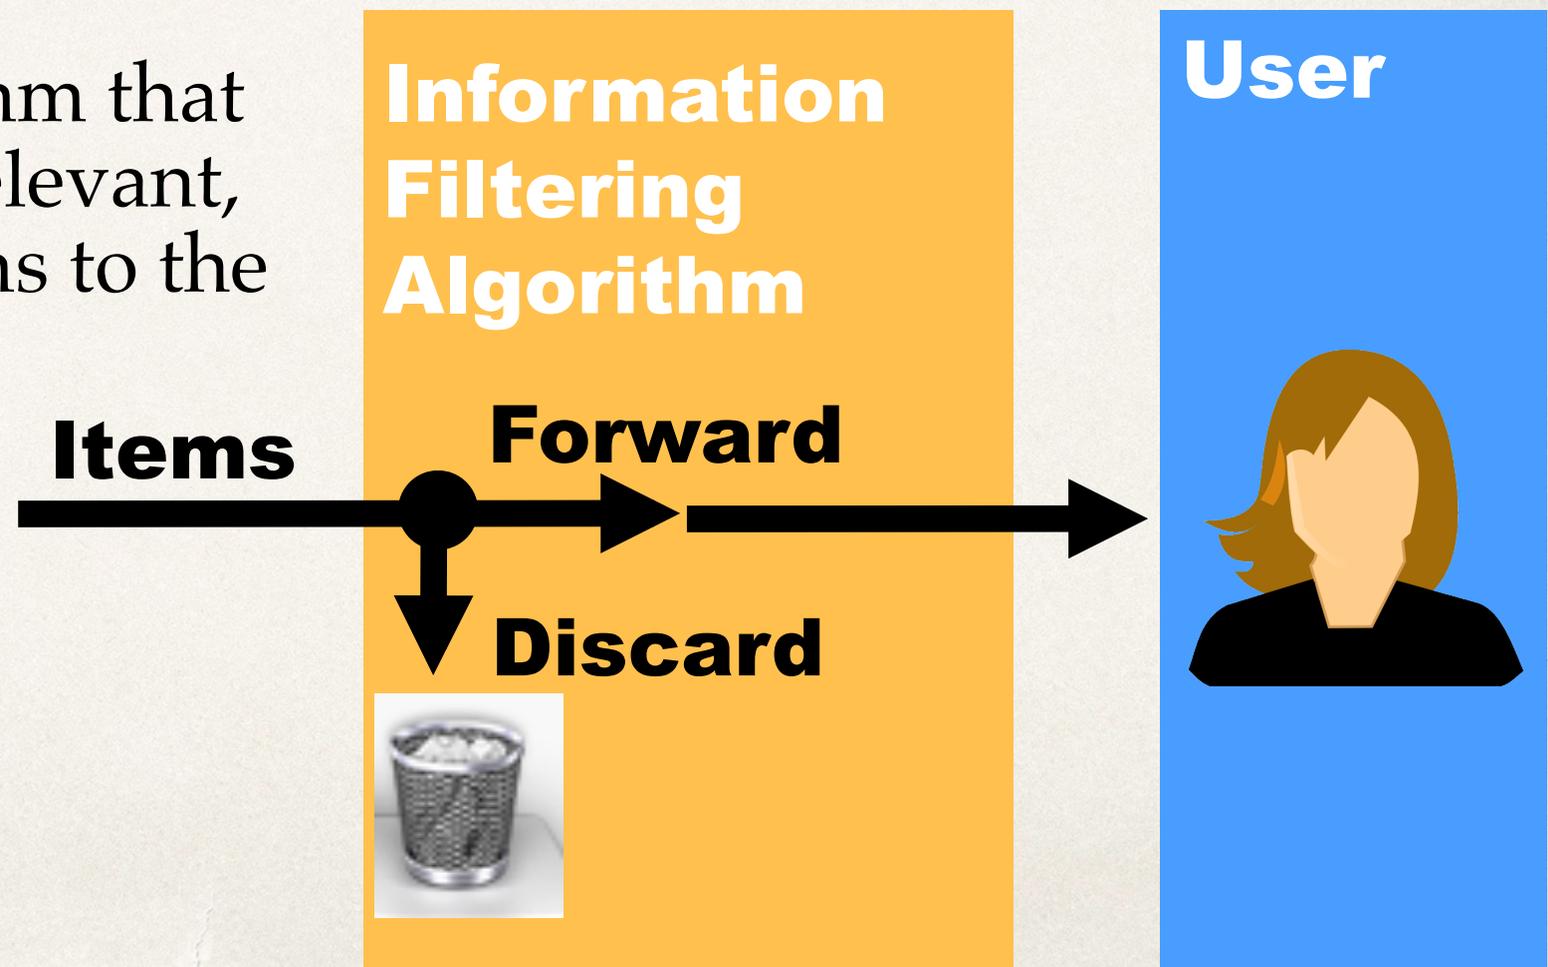


We are interested in

# information filtering

- ❖ If we had lots of historical data, we could train a machine learning classifier to predict which items would be relevant to this user.
- ❖ But what if we are doing information filtering for a new user?

- ❖ **Research Question:** How can we quickly learn user preferences, without forwarding too many irrelevant items?
- ❖ This is called the **cold start** problem.

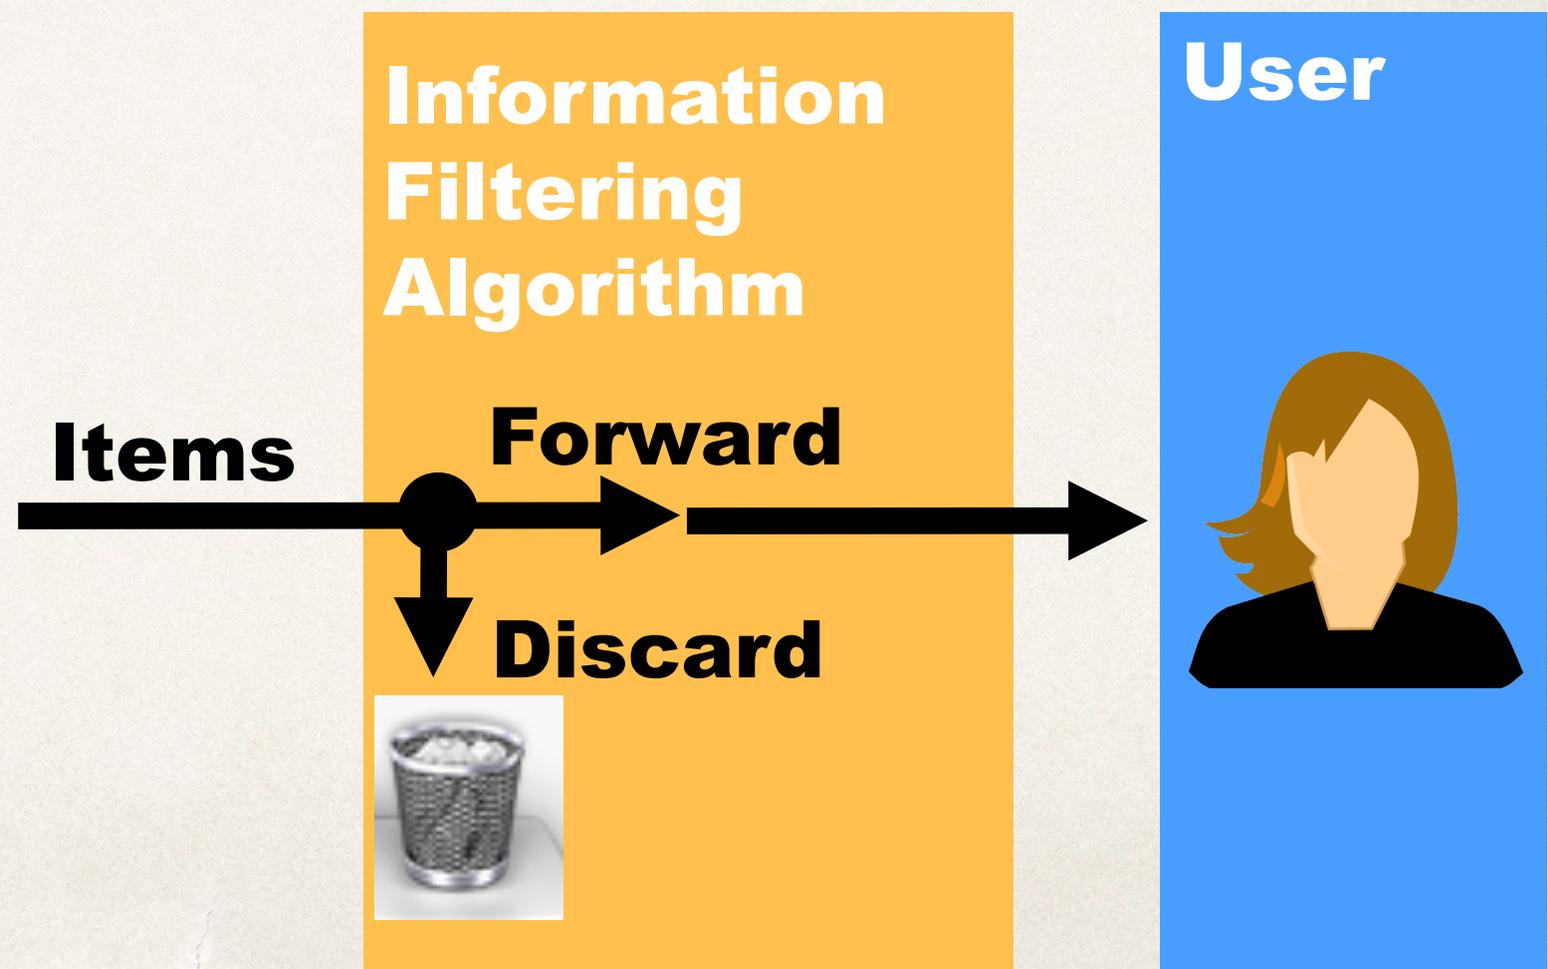

# We are motivated by an information filtering system we are building for arxiv.org



Cornell University  
Library

arXiv.org

Open access to 826,463 e-prints in Physics, Mathematics, Computer Science  
Subject search and browse:

29 Aug 2012: [Simons Foundation funds new arXiv sustainability model](#)  
See cumulative "What's New" pages. Read [robots beware](#) before attempting

## Physics

- [Astrophysics \(astro-ph new, recent, find\)](#)  
includes: [Cosmology and Extragalactic Astrophysics](#); [Earth and Planetary Astrophysics](#); [Solar and Stellar Astrophysics](#)
- [Condensed Matter \(cond-mat new, recent, find\)](#)  
includes: [Disordered Systems and Neural Networks](#); [Materials Science of Condensed Matter](#); [Strongly Correlated Electrons](#); [Superconductivity](#)
- [General Relativity and Quantum Cosmology \(gr-qc new, recent, find\)](#)
- [High Energy Physics - Experiment \(hep-ex new, recent, find\)](#)
- [High Energy Physics - Lattice \(hep-lat new, recent, find\)](#)
- [High Energy Physics - Phenomenology \(hep-ph new, recent, find\)](#)
- [High Energy Physics - Theory \(hep-th new, recent, find\)](#)
- [Mathematical Physics \(math-ph new, recent, find\)](#)
- [Nonlinear Sciences \(nlin new, recent, find\)](#)  
includes: [Adaptation and Self-Organizing Systems](#); [Cellular Automata and Computational Intelligence](#)
- [Nuclear Experiment \(nucl-ex new, recent, find\)](#)
- [Nuclear Theory \(nucl-th new, recent, find\)](#)

❖ arXiv.org is an electronic repository of scientific papers hosted by Cornell.

❖ Papers are in physics, math, CS, statistics, finance, and biology.

❖ arXiv currently has  $\approx 900,000$  articles, and 16 million unique users accessing the site each month.

❖ 7000+ new articles submitted every month.

# Our goal is to improve daily & weekly new-article feeds



Cornell University  
Library

arXiv.org > astro-ph

## Astrophysics

### New submissions

Submissions received from Mon 4 Mar 13 to Tue 5 Mar 13, announced

- [New submissions](#)
- [Cross-lists](#)
- [Replacements](#)

[ total of 79 entries: 1-79 ]

[ showing up to 2000 entries per page: [fewer](#) | [more](#) ]

### New submissions for Wed, 6 Mar 13

[1] [arXiv:1303.0833](#) [[pdf](#), [ps](#), [other](#)]

#### **Transverse oscillations in solar spicules induce**

[H. Ebadi](#), [M. Hosseinpour](#), [Z. Fazel](#)

Comments: Accepted for publication in *Astrophysics and Space Science*

Subjects: **Solar and Stellar Astrophysics (astro-ph.SR)**

The excitation of Alfvénic waves in the solar spicules due to the sheared magnetic fields is solved. Stratification due to gravity and transition region can penetrate from transition region into the corona.

❖ Many physicists visit the arXiv every day to browse the list of new papers, to stay aware of the latest research.

❖ There are lots of new papers (roughly 80 new papers / day in astrophysics.)

❖ *Problem 1:* Browsing this many papers is a lot of work for researchers.

❖ *Problem 2:* Researchers still miss important developments.

# Our goal is to improve daily & weekly new-article feeds

You are logged in as *pfrazier\_Dec30* [My account] [Log out?]

**my:arXiv**   [Search help](#)

---

### Personalization tools

- Recommended for you
- Your personal folder (95)
- Past activity
- Your account settings
- Research tools (staff only)

### Articles by category

- Physics
- Mathematics
- Non-linear Sciences
- Computer Science
- Quantitative Biology
- Quantitative Finance
- Statistics

### Recent articles recommended for you

Suggestion list [no. 15044 \(ee4sug/20131216.05063.000002.txt\)](#) was generated for user *pfrazier\_Dec30* at: Mon Dec 16 01:23:23 EST 2013 (11 hours ago). It contains some articles of possible interest to you selected from those released since Mon Sep 23 02:17:15 EDT 2013.

[Merge=true](#)

The entire list contains 191 articles. Articles ranked from 1 through 10 are shown below.

1. [\[score=0.6940000057220459\]](#) arXiv:1312.3352; 2013-12-10 [Details] [PDF/PS/etc]  
Asymptotic theory of sequential detection and identification in the hidden Markov models  
Savas Dayanik, Kazutoshi Yamazaki  
Subjects:math.OA math.ST stat.TH  
[Expand](#)

Interesting: [move to my folder](#), [remove from list](#) Interesting; [remove from list](#) Not interesting; [remove from list](#)

2. [\[score=3.999349355697632\]](#) arXiv:1312.3516; 2013-12-11 [Details] [PDF/PS/etc]  
Density Estimation in Infinite Dimensional Exponential Families  
Bharath Sriperumbudur, Kenji Fukumizu, Arthur Gretton, Aapo Hyvärinen  
Subjects:math.ST stat.ME stat.ML stat.TH  
[Expand](#)

Interesting: [move to my folder](#), [remove from list](#) Interesting; [remove from list](#) Not interesting; [remove from list](#)

3. [\[score=0.6940000057220459\]](#) arXiv:1312.3921; 2013-12-12 [Details] [PDF/PS/etc]  
A Relaxed-Projection Splitting Algorithm for Variational Inequalities in Hilbert Spaces  
J. Y. Bello Cruz, R. Diaz Millan  
Subjects:math.OA

My.ArXiv Version 0.2.038 (2013-11-16)

This project is supported by the National Science Foundation:  
(#NSF IIS-1142251)  
(BIGDATA: Mid-Scale: ESCE:



# Other people have thought about exploration vs. exploitation in information retrieval too

---

- ❖ Multi-armed bandits is a big topic:
  - ❖ Bayesian treatments: [Gittins & Jones, 1974; Whittle 1980] ...
  - ❖ non-Bayesian treatments: [Auer, Cesa-Bianchi, Freund, Schapire, 1995; Auer, Cesa-Bianchi & Fischer, 2002] ...
- ❖ Exploration vs. exploitation & multi-armed bandits in information retrieval: [Zhang, Xu & Callan 2003; Agarwal, Chen & Elango 2009; Yue, Broder, Kleinberg & Joachims 2009; Hofmann, Whistone & Rijke 2012]
- ❖ We have an earlier paper that assume instantaneous review, and a unit cost for forwarding [Xiao & Frazier 2014]. This work generalizes that.



# Outline

---

- ❖ Model #1: pay a cost for each forwarded item
- ❖ Model #2: limit the number of forwarded items




# Outline

---

- ❖ Categorizing items
- ❖ Model #1: pay a cost for each forwarded item
- ❖ Model #2: limit the number of forwarded items



We use a pre-processing step that divides items into  $k$  categories

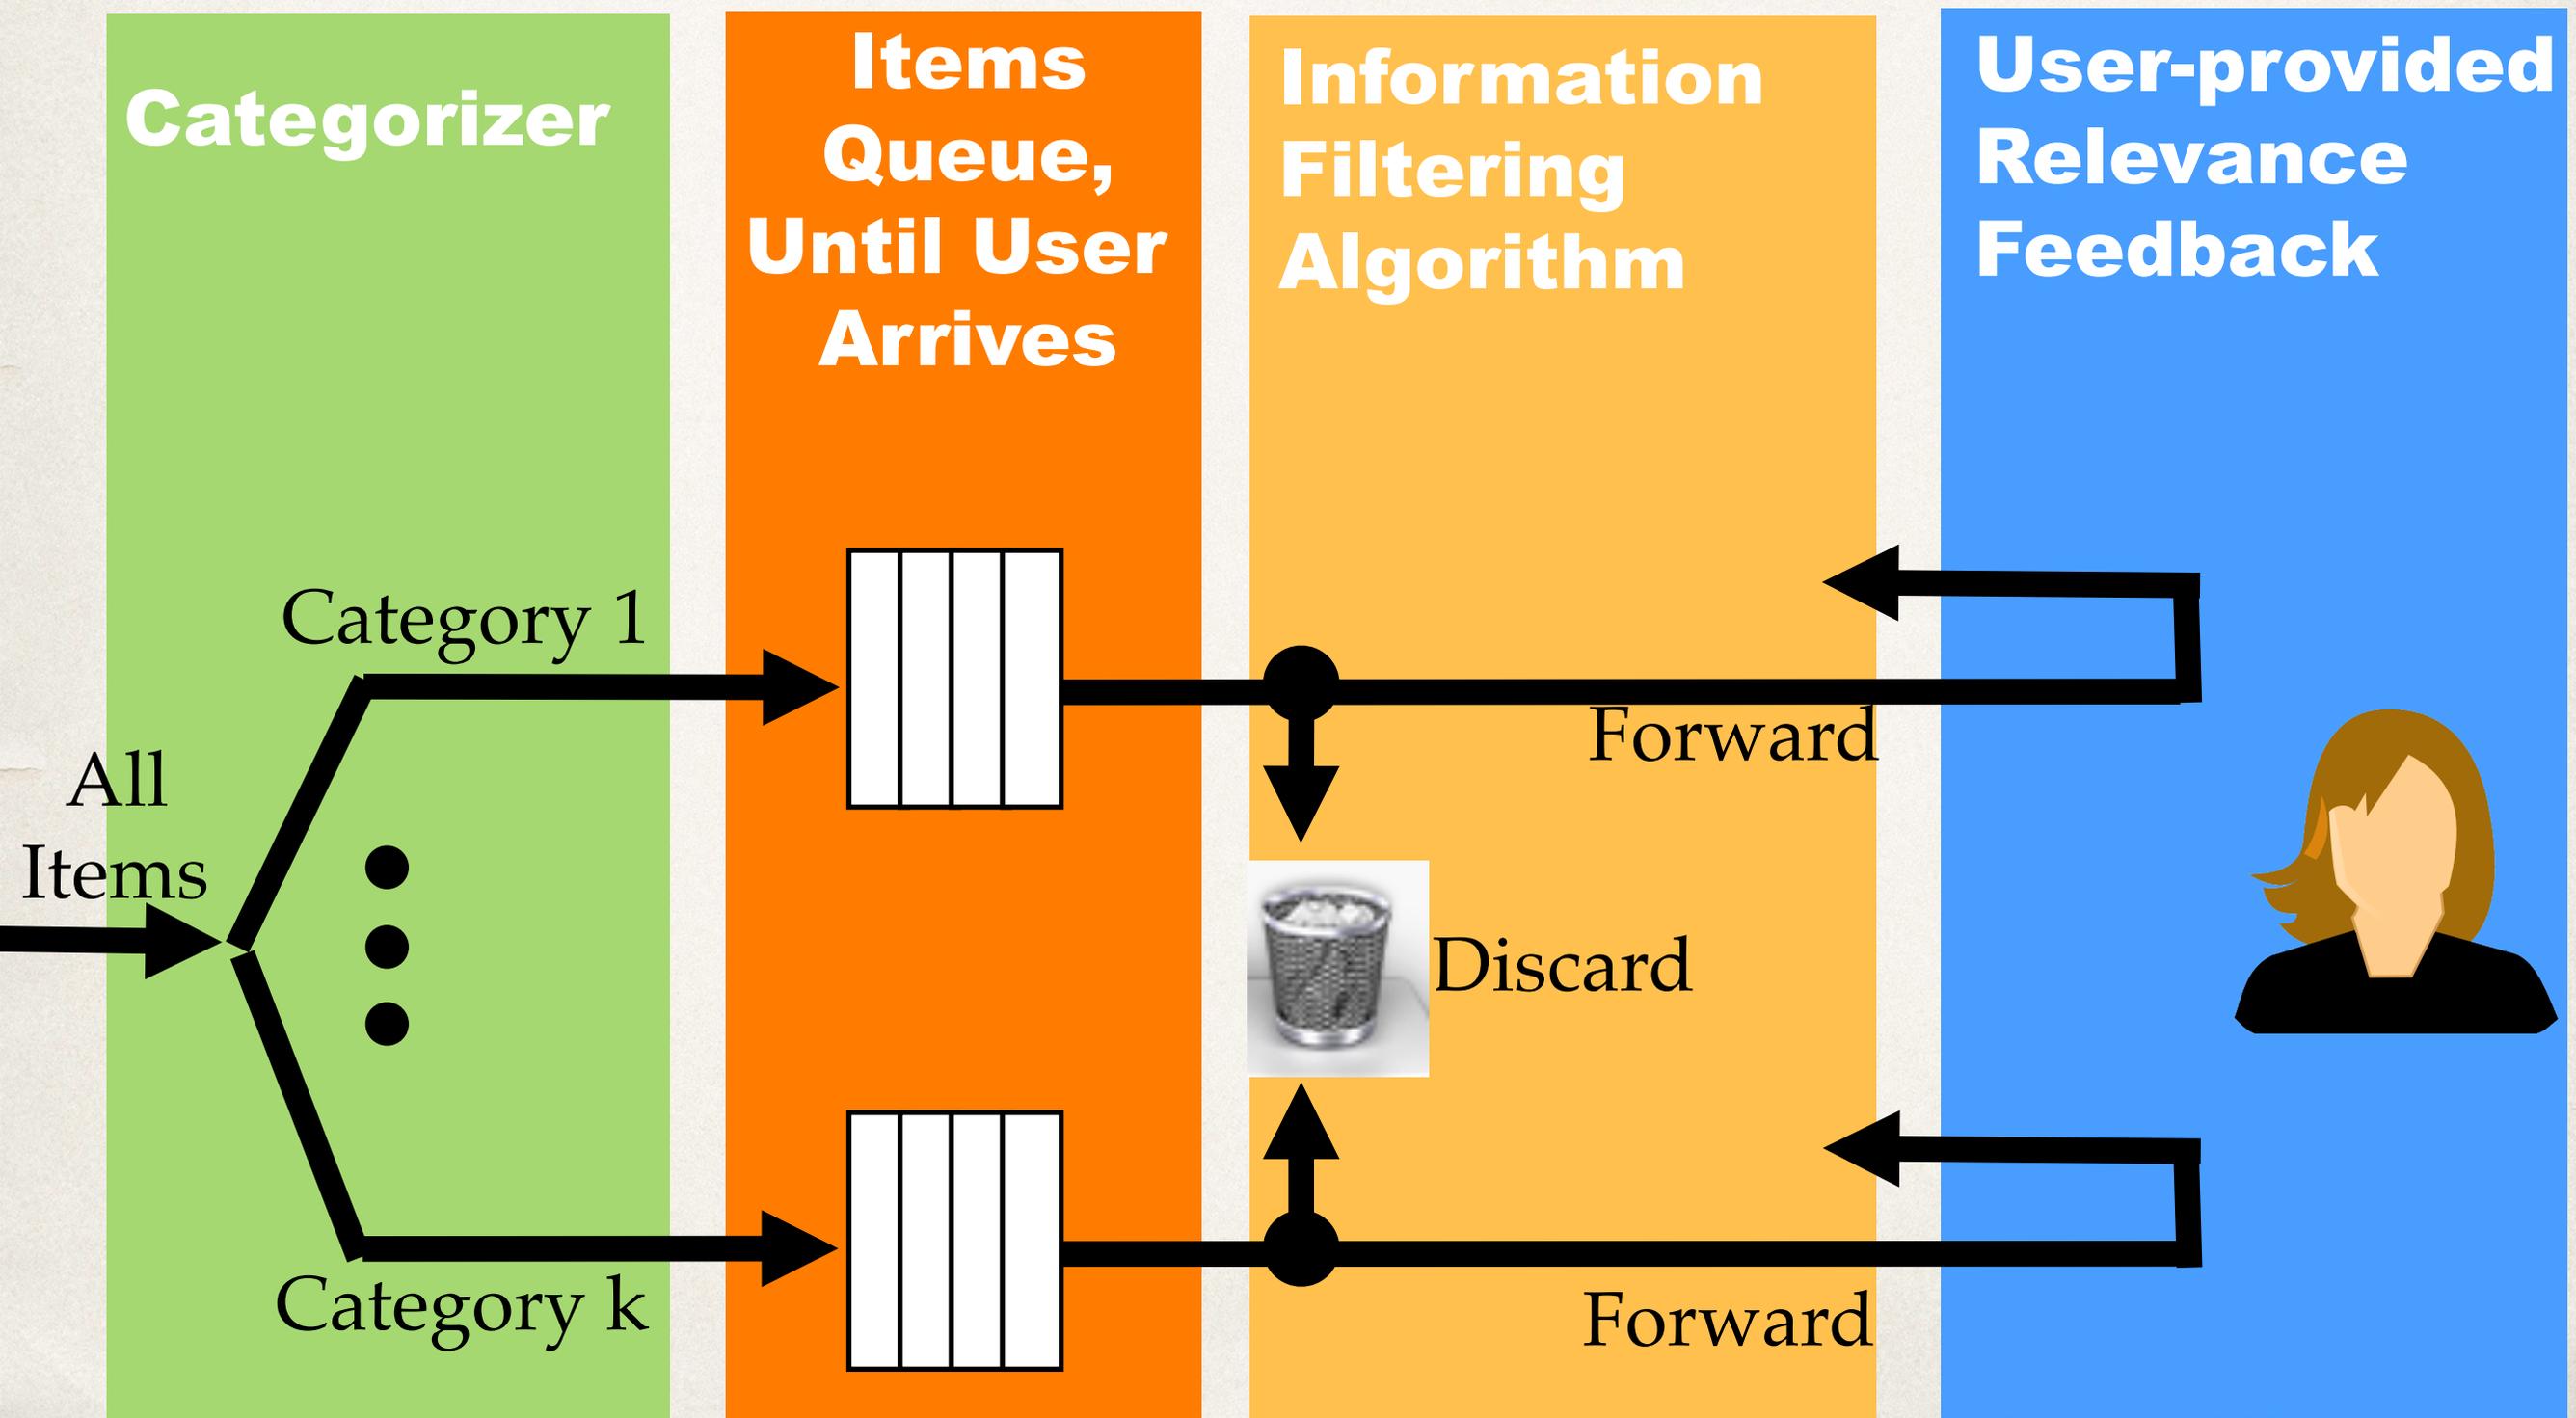

# Model

---

- ❖ Fix a user. We consider each user separately.
- ❖ An item from category  $x$  is relevant to the user with probability  $\theta_x$ .
- ❖ We have an independent Bayesian prior distribution on  $\theta_x$ ,

$$\theta_x \sim \text{Beta}(\alpha_{0x}, \beta_{0x})$$

# Model

---

- ❖ Items arrive according to a Poisson process.
- ❖ Item categories are iid.
- ❖ The user arrives randomly, with exponential inter-arrival times.
- ❖ Items accumulate in a queue until the user's next arrival.
- ❖  $L_{nx}$  is the # of items in queue from category  $x$  at the  $n^{\text{th}}$  user arrival, and is geometric.



# Model

---

- ❖ The posterior on  $\theta_x$  at the  $n^{\text{th}}$  user arrival is  $\text{Beta}(\alpha_{nx}, \beta_{nx})$ .
- ❖ We choose  $Z_{nx}$ , the # of items to show from category  $x$ , based on  $(\alpha_{nx}, \beta_{nx}, L_{nx})$ .
- ❖ We observe relevance feedback for each of the  $Z_{nx}$  items shown. The number of relevant items is:
  - ❖  $Y_{nx} \mid \theta_x, Z_{nx} \sim \text{Binomial}(\theta_x, Z_{nx})$
- ❖ Our posterior is  $\text{Beta}(\alpha_{n+1,x}, \beta_{n+1,x})$ , where
  - $\alpha_{n+1,x} = \alpha_{n,x} + Y_{nx}$  counts the # of relevant items,
  - $\beta_{n+1,x} = \beta_{n,x} + Z_{nx} - Y_{nx}$  counts the # of irrelevant items.



# Model

---

- ❖ We can forward as many available items as we want.  
We pay a cost  $c$  for each.  
[Model 2 will replace this cost per item with a constraint on the # of items shown]
- ❖ We get an additional reward of 1 for each relevant item shown, and no additional reward for 0 irrelevant item.
- ❖ The user leaves the system at random exponential time.  
The # of arrivals  $N$  before she leaves is geometric.
- ❖ We want to maximize the total expected reward before the user leaves.



# Model


---

- ❖ Our net reward is the total number of **relevant** items shown, minus the cost of **all** items shown,  $(Y_{nx} - c Z_{nx})$ .
- ❖ Our goal is to design an algorithm  $\pi$  that solves


$$\sup_{\pi \in \Pi} E^{\pi} \sum_{n=1}^N \sum_{x=1}^k (Y_{nx} - c Z_{nx}),$$



This diagram summarizes our model

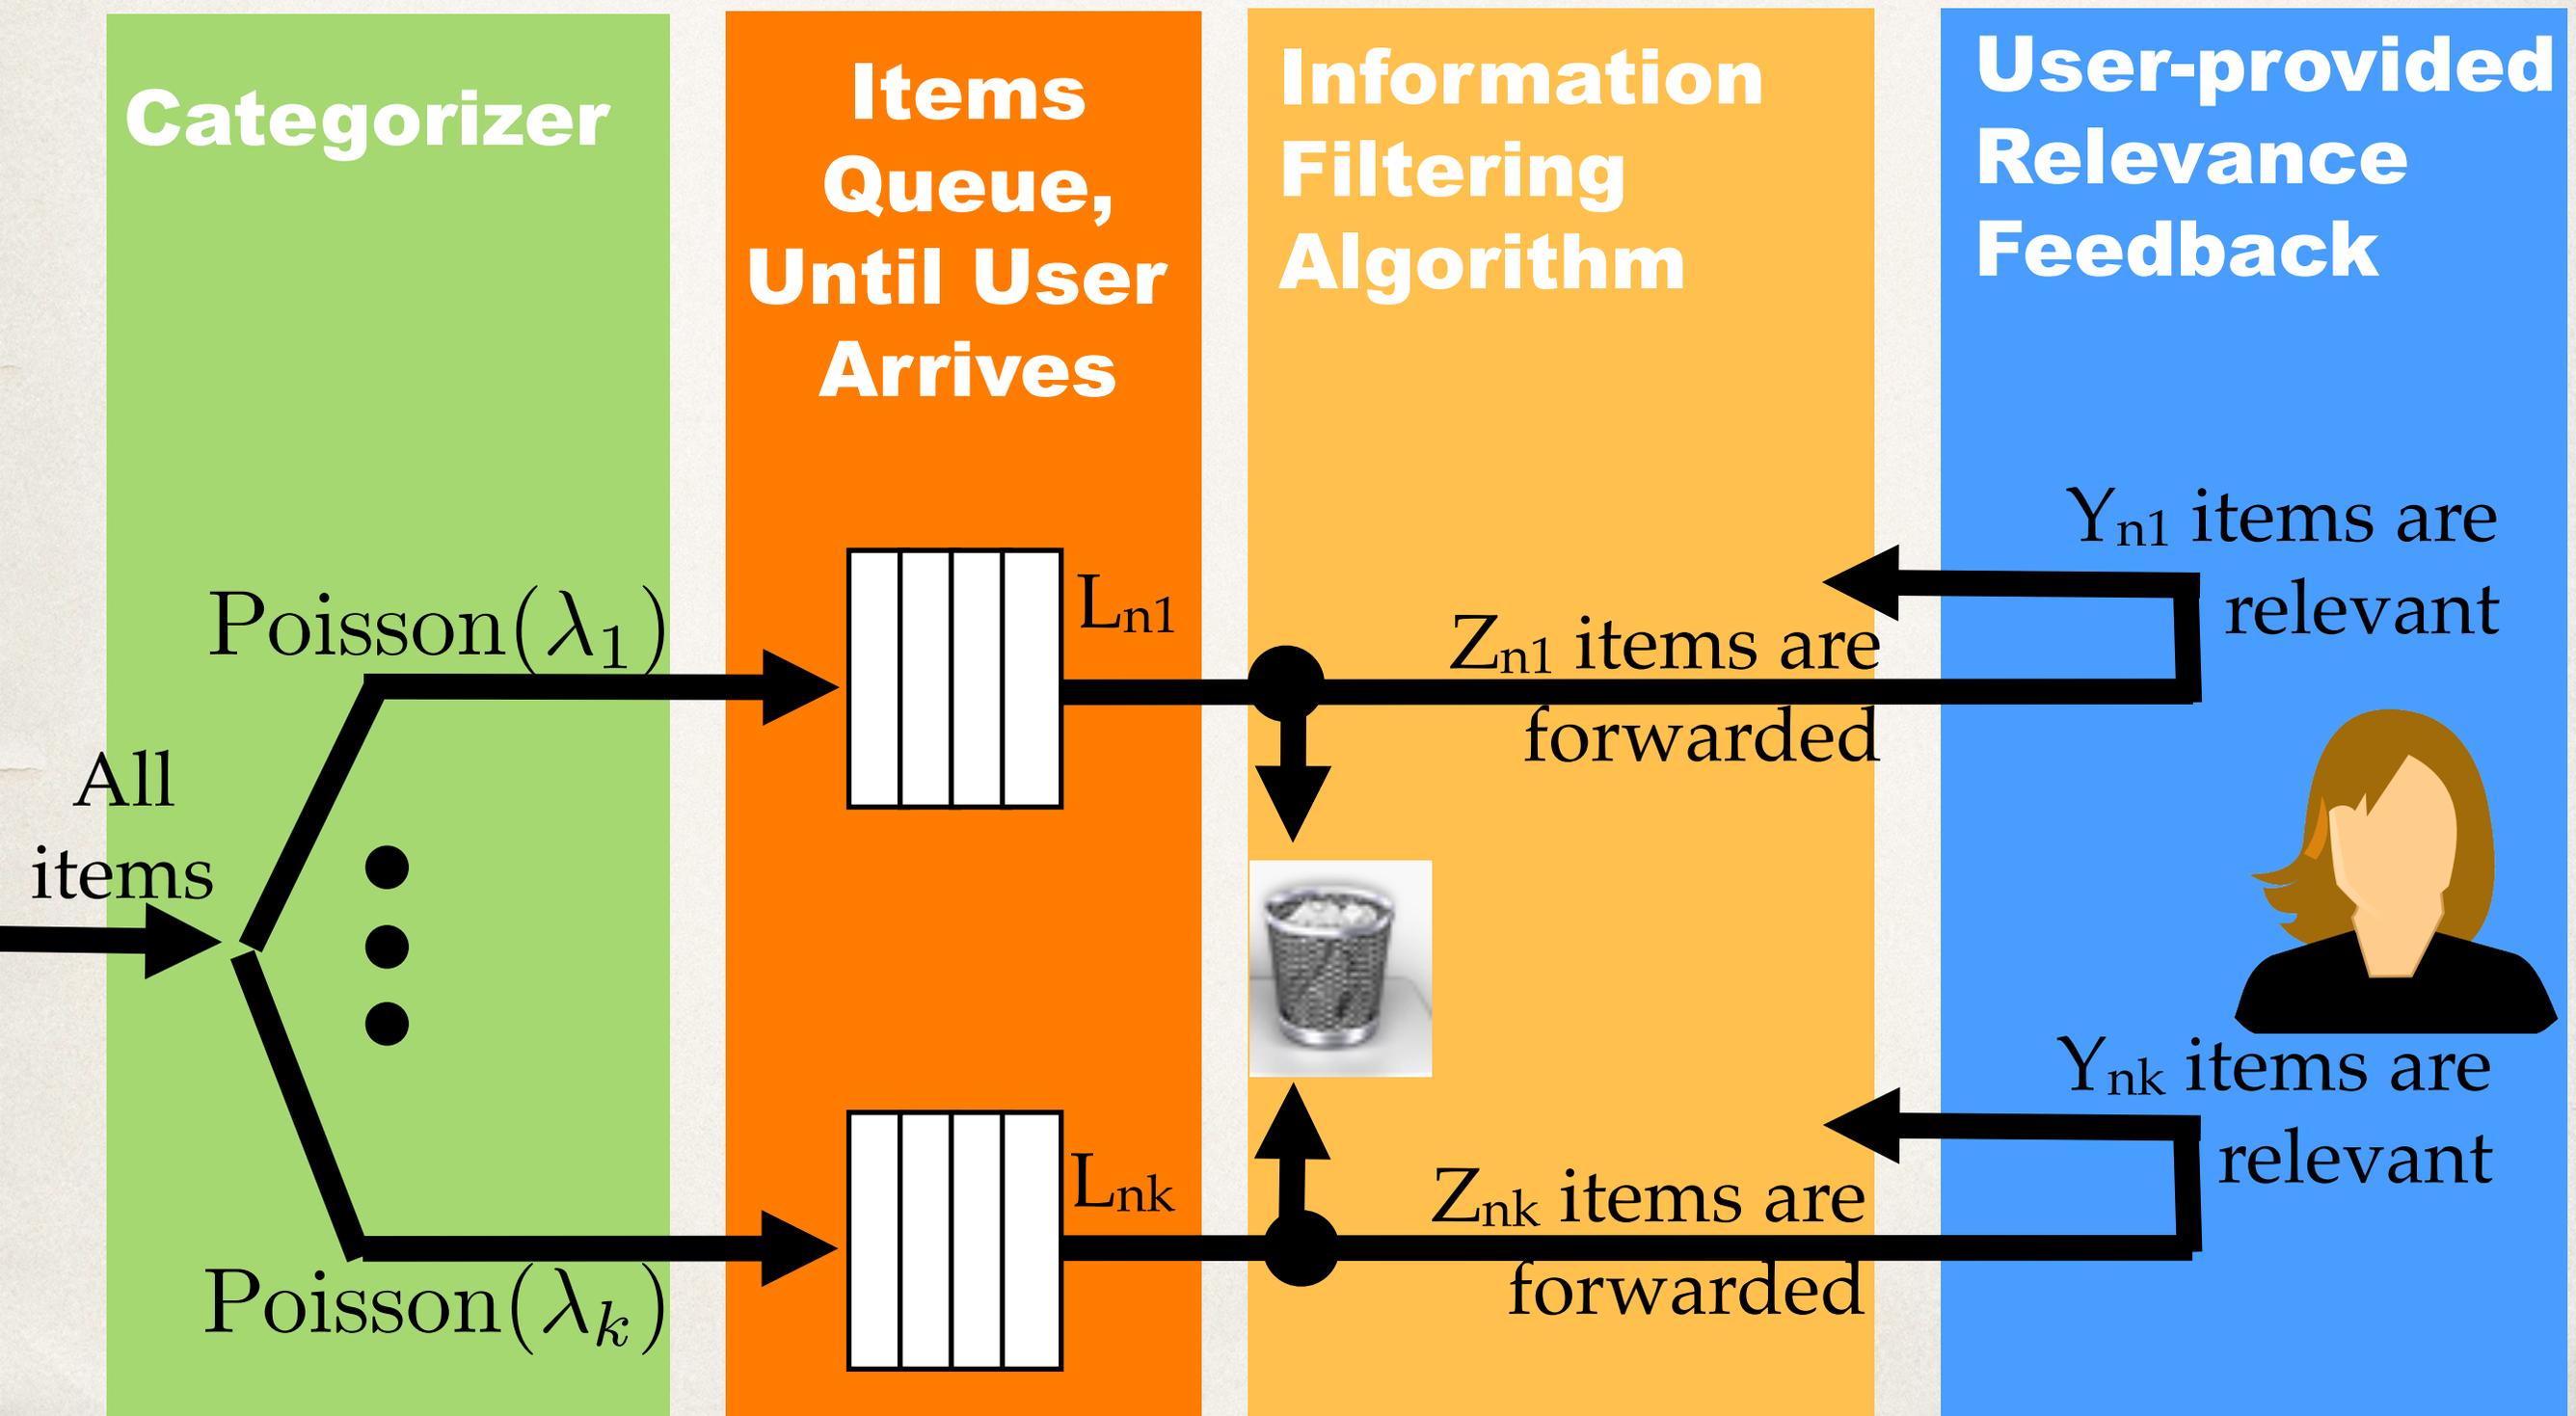


# Let's first solve the problem for a single category

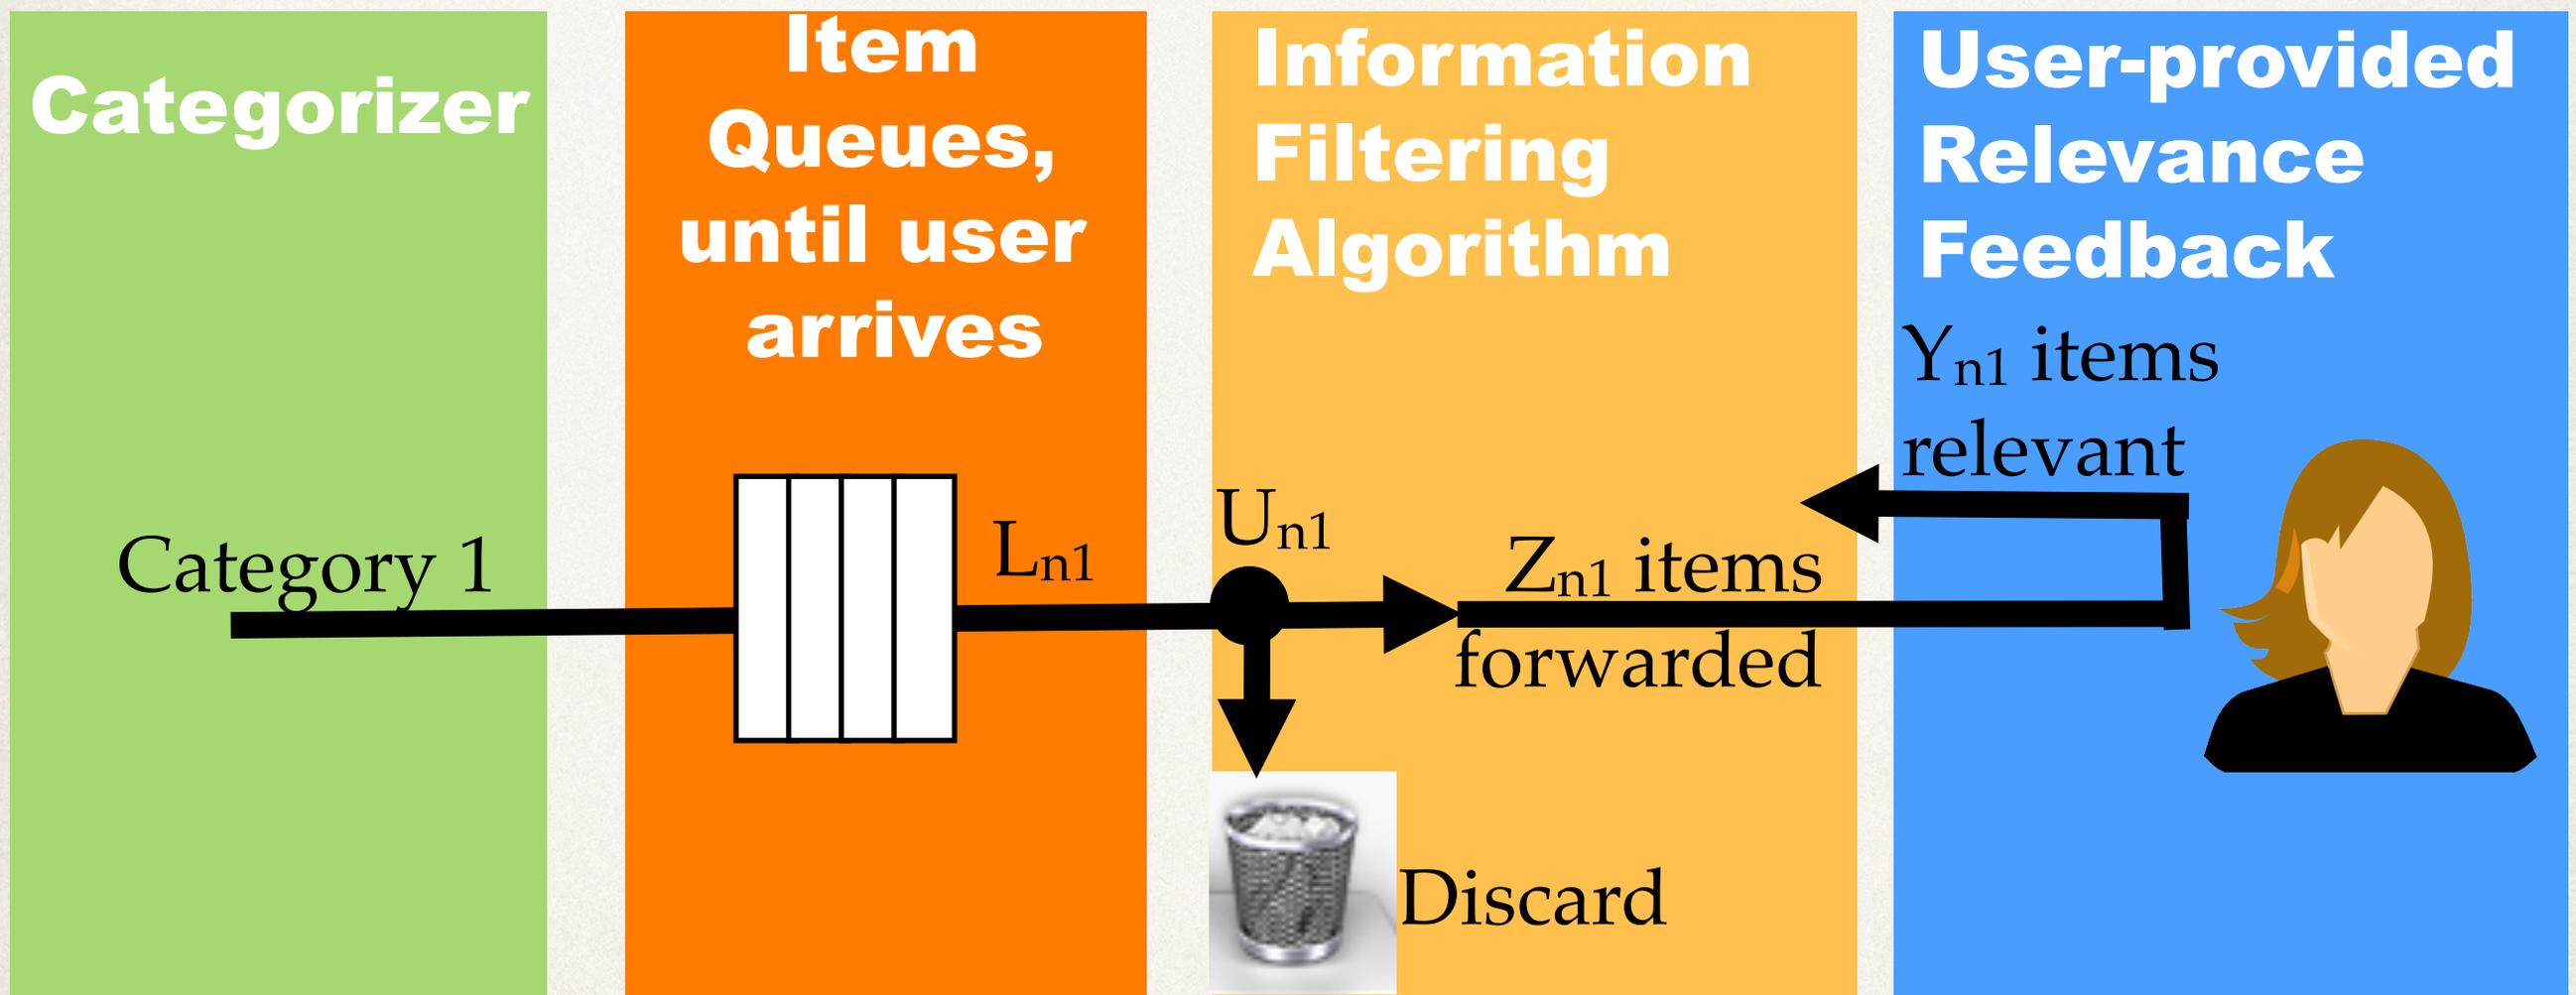

# The single category problem can be solved as a small stochastic dynamic program

❖ Let  $V_x(\alpha_{nx}, \beta_{nx})$  be the expected future reward for a single category  $x$  under the optimal policy, given  $n$  documents of history.

❖  $V_x$  can be calculated via dynamic programming:

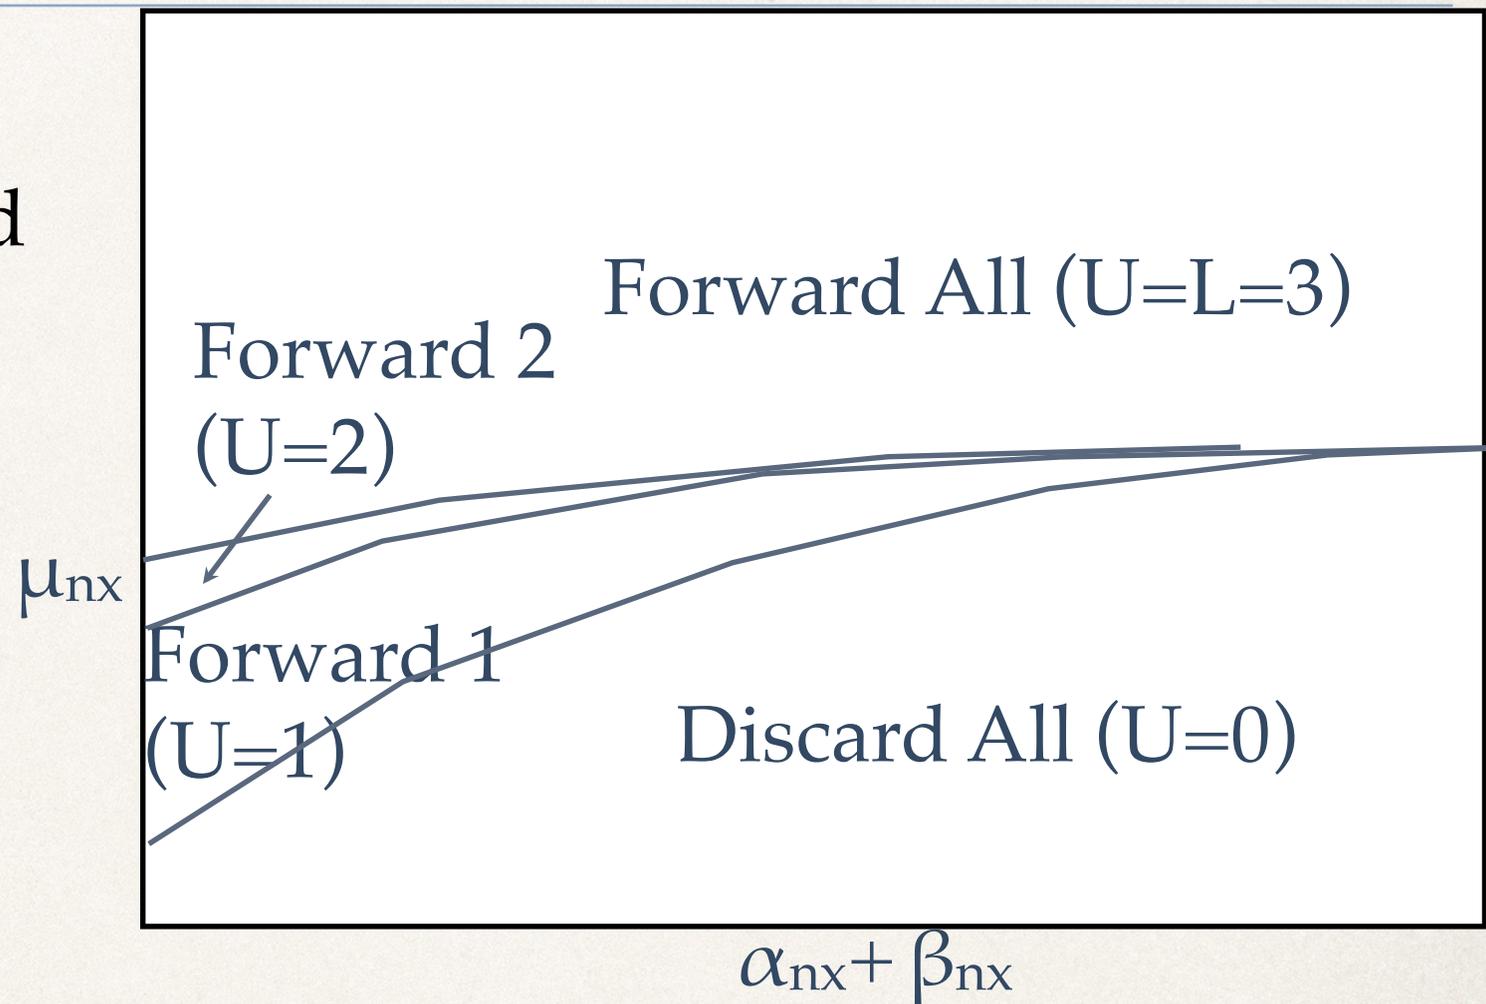

$$V_x(\alpha_{n-1,x}, \beta_{n-1,x}) = \sum_L P(L_{nx} = L) \cdot$$

$$\max_{Z_{nx} \in \{0, 1, \dots, L\}} E[Y_{nx} - cZ_{nx} + \gamma V_x(\alpha_{nx} + Y_{nx}, \beta_{nx} + Z_{nx} - Y_{nx}) | Z_{nx}, \alpha_{nx}, \beta_{nx}]$$



We avoid the curse of dimensionality by decomposing the multi-category problem into  $k$  single-category problems.

---

- ❖ We can solve single-category problems via stochastic dynamic programming.
- ❖ The optimal policy for multiple categories is:
  - (1) look at the category  $x$  of the arriving paper;
  - (2) forward the # of papers recommended by category  $x$ 's optimal policy.
- ❖ The value of this optimal multi-category strategy is the sum of the values of the optimal single-category strategies.



# Outline

---

- ❖ Categorizing items
- ❖ Model #1: pay a cost for each forwarded item
- ❖ Model #2: limit the number of forwarded items



# In reality, we do not know $c$ , the cost of the user's time.

- ❖ Rather than forwarding a set of items based on  $c$ , we present **all** of the available items, in a ranked list.
- ❖ A user starts at the top of the list, and looks at  $M_n$  items in the presented order until he or she decides to stop.

The screenshot shows the my:arXiv website interface. At the top, it says "You are logged in as pfrazier\_Dec30 [My account] [Log out?]" and "Search Search help". The main content area is titled "Recent articles recommended for you" and shows a suggestion list for user pfrazier\_Dec30. The list contains 191 articles, with the first 10 shown. Each article entry includes a score, arXiv ID, date, title, authors, and subjects. For example, the first article has a score of 0.6940000057220459, arXiv ID 1312.3352, and is titled "Asymptotic theory of sequential detection and identification in the hidden Markov models". The interface also includes a sidebar with "Personalization tools" (Recommended for you, Your personal folder (95), Past activity, Your account settings, Research tools (staff only)) and "Articles by category" (Physics, Mathematics, Non-linear Sciences, Computer Science, Quantitative Biology, Quantitative Finance, Statistics). At the bottom, it mentions "My.ArXiv Version 0.2.038 (2013-11-16)" and is supported by the National Science Foundation (#NSF IIS-1142251).

my:arXiv

You are logged in as pfrazier\_Dec30 [My account] [Log out?]

Search Search help

Personalization tools

- Recommended for you
- Your personal folder (95)
- Past activity
- Your account settings
- Research tools (staff only)

Articles by category

- Physics
- Mathematics
- Non-linear Sciences
- Computer Science
- Quantitative Biology
- Quantitative Finance
- Statistics

My.ArXiv Version 0.2.038 (2013-11-16)

This project is supported by the National Science Foundation: (#NSF IIS-1142251) (BIGDATA: Mid-Scale: ESCE: Collaborative Research: Discovery and Social Analytics for Large-Scale Scientific Literature. Award Number:1247696)

Recent articles recommended for you

Suggestion list no. 15044 (ee4sug/20131216.05063.000002.txt) was generated for user pfrazier\_Dec30 at: Mon Dec 16 01:23:23 EST 2013 (11 hours ago). It contains some articles of possible interest to you selected from those released since Mon Sep 23 02:17:15 EDT 2013.

Merge=true

The entire list contains 191 articles. Articles ranked from 1 through 10 are shown below.

- [score=0.6940000057220459] arXiv:1312.3352; 2013-12-10 [Details] [PDF/PS/etc]  
Asymptotic theory of sequential detection and identification in the hidden Markov models  
Savas Dayanik, Kazutoshi Yamazaki  
Subjects:math.OC math.ST stat.TH  
Expand  
Interesting: move to my folder, remove from list Interesting; remove from list Not interesting; remove from list
- [score=3.999349355697632] arXiv:1312.3516; 2013-12-11 [Details] [PDF/PS/etc]  
Density Estimation in Infinite Dimensional Exponential Families  
Bharath Sriperumbudur, Kenji Fukumizu, Arthur Gretton, Aapo Hyvärinen  
Subjects:math.ST stat.ME stat.ML stat.TH  
Expand  
Interesting: move to my folder, remove from list Interesting; remove from list Not interesting; remove from list
- [score=0.6940000057220459] arXiv:1312.3921; 2013-12-12 [Details] [PDF/PS/etc]  
A Relaxed-Projection Splitting Algorithm for Variational Inequalities in Hilbert Spaces  
J. Y. Bello Cruz, R. Diaz Millan  
Subjects:math.OC  
Expand  
Interesting: move to my folder, remove from list Interesting; remove from list Not interesting; remove from list
- [score=3.9975686073303223] arXiv:1311.7656; 2013-11-28 [Details] [PDF/PS/etc]  
Statistical estimation for optimization problems on graphs  
Mikhail Langovoy, Suvrit Sra  
Subjects:stat.ML cs.DM math.OC stat.CO stat.ME  
Expand  
Interesting: move to my folder, remove from list Interesting; remove from list Not interesting; remove from list

# Model #2

we constrain the # of items shown

---

- ❖ Pretend, for a moment, that we know  $M_n$  before deciding  $Z_{nx}$ .
- ❖ We wish to solve

$$V = \sup_{\tilde{\pi} \in \tilde{\Pi}} E^{\tilde{\pi}} \sum_{n=1}^N \sum_{x=1}^k Y_{nx}$$

where  $\tilde{\Pi} = \{\pi : \sum_{x=1}^k Z_{nx} \leq M_n \quad \forall n\}$

- ❖ We can no longer decompose the problem into  $k$  subproblems.
- ❖ Computation scales exponentially in  $k$  due to the curse of dimensionality.



# We relax the problem

---

We relax this constraint,

$$\sum_{x=1}^k Z_{nx} \leq M_n$$

and replace it by this penalty,

$$-v_n \left( \sum_{x=1}^k Z_{nx} - M_n \right)$$

where  $v_n \geq 0$  is a Lagrange multiplier.



# We can solve the relaxed problem

---

- ❖ Let  $\mathbf{v} = (v_1, v_2, \dots) \geq 0$  be our Lagrange multipliers.
- ❖ Our relaxed problem is:

$$V^v = \sup_{\pi \in \Pi} \mathbb{E}^\pi \sum_{n=1}^N \left[ \sum_{x=1}^k Y_{nx} - v_n \left( \sum_{x=1}^k Z_{nx} - M_n \right) \right]$$

- ❖ This problem has the same form as problem #1, and decomposes across categories. That makes it easy to solve.



# The relaxed problem is an upper bound on the value of the optimal policy

**Theorem:**  $V^{\mathbf{v}} \geq V$  for any  $\mathbf{v} = (v_1, v_2, \dots) \geq 0$ .

**Corollary:**  $\inf_{\mathbf{v} \geq 0} V^{\mathbf{v}} \geq V$ .

This upper bound can be computed using a first-order convex optimization method because:

- $V^{\mathbf{v}}$  is convex in  $\mathbf{v}$ ;
- Subgradients of  $V^{\mathbf{v}}$  can be computed directly from an optimal policy for the relaxed problem.



# The relaxed problem also inspires a policy, called MDP-IF.

---


- ❖ The **MDP-IF** (**M**arkov **D**ecision **P**rocess **I**nformation **F**iltering) algorithm:
- ❖ Let  $v^*(m, \alpha_{nx}, \beta_{nx})$  be the largest cost  $v_1=v_2=\dots$  in the relaxed problem such that  $Z_{nx} \geq m$ , i.e., such that we would forward at least  $m$  items.
- ❖ Assign the  $m^{\text{th}}$  available item in cluster  $x$  the “value”  $v^*(m, \alpha_{nx}, \beta_{nx})$ .
- ❖ Present items in decreasing order of  $v^*(m, \alpha_{nx}, \beta_{nx})$ .
- ❖ The user looks at the top  $M_n$  items.
- ❖ This algorithm does not need to know  $M_n$ .




# MDP-IF outperforms benchmarks

[here,  $M = 5$ ,  $c = 0.49$ ,  $L \sim \text{Geometric}(\xi_x)$ ]


$\gamma = 0.95$ ,  $\alpha_x = \beta_x = 1$ ,  $\xi_x = .1$

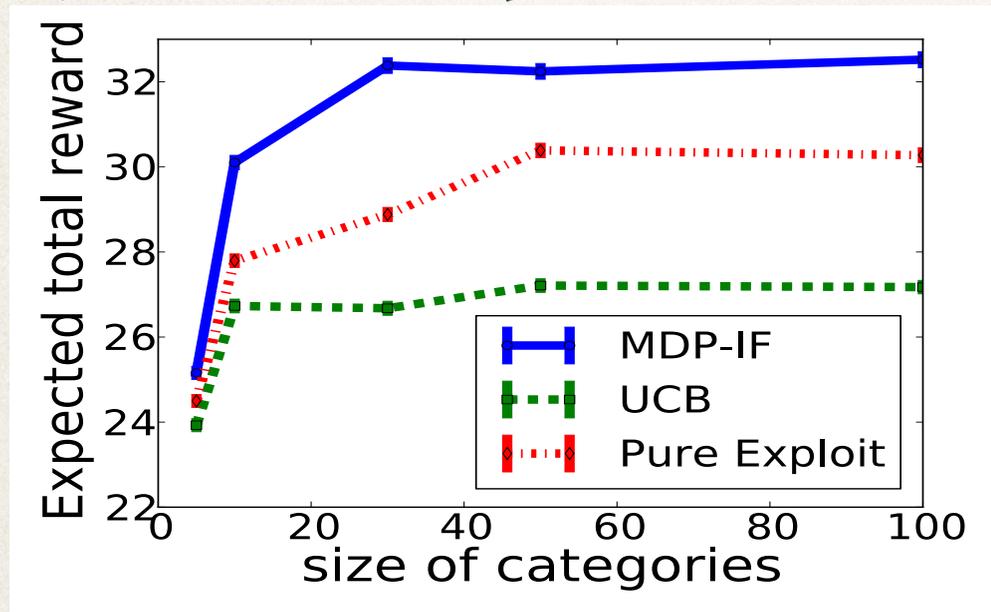


$\gamma = 0.99$ ,  $\alpha_x = \beta_x = 1$ ,  $\xi_x = .1$

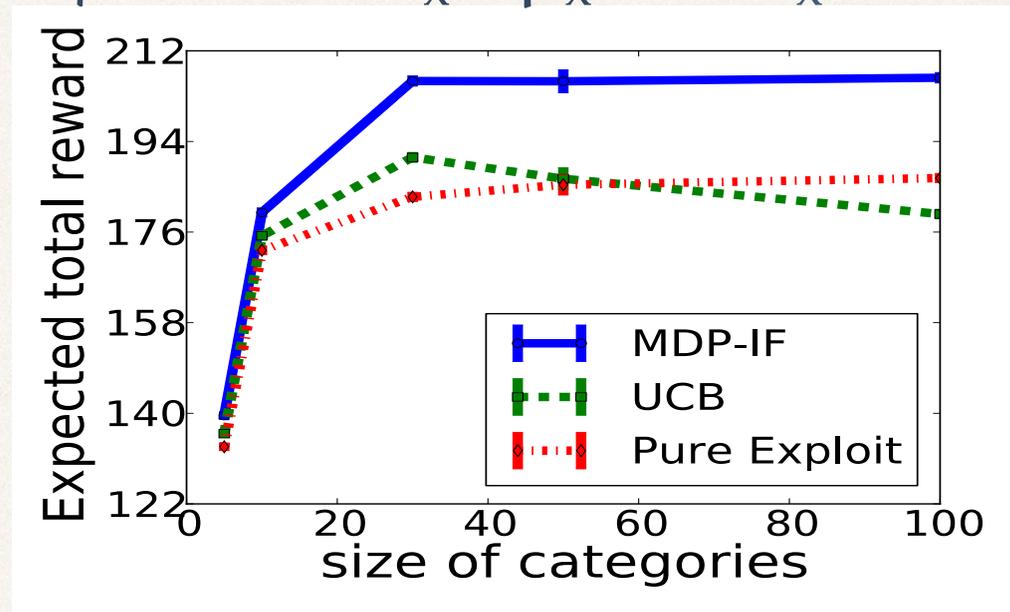

$\gamma = 0.99$ ,  $\alpha_x = \beta_x = 1$ ,  $\xi_x = .2$

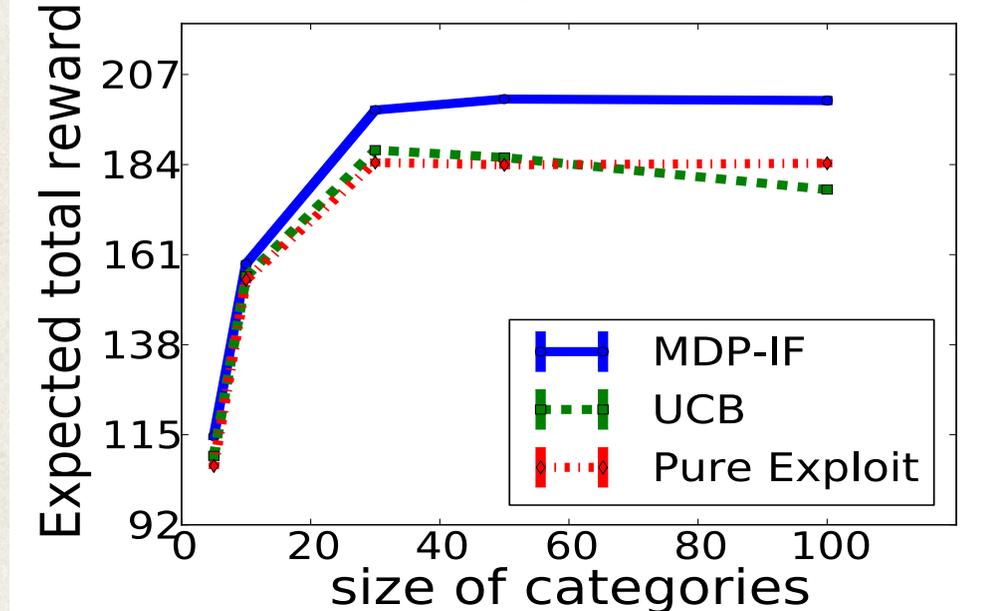

$\gamma = 0.99$ ,  $\alpha_x = \beta_x = 5$ ,  $\xi_x = .1$

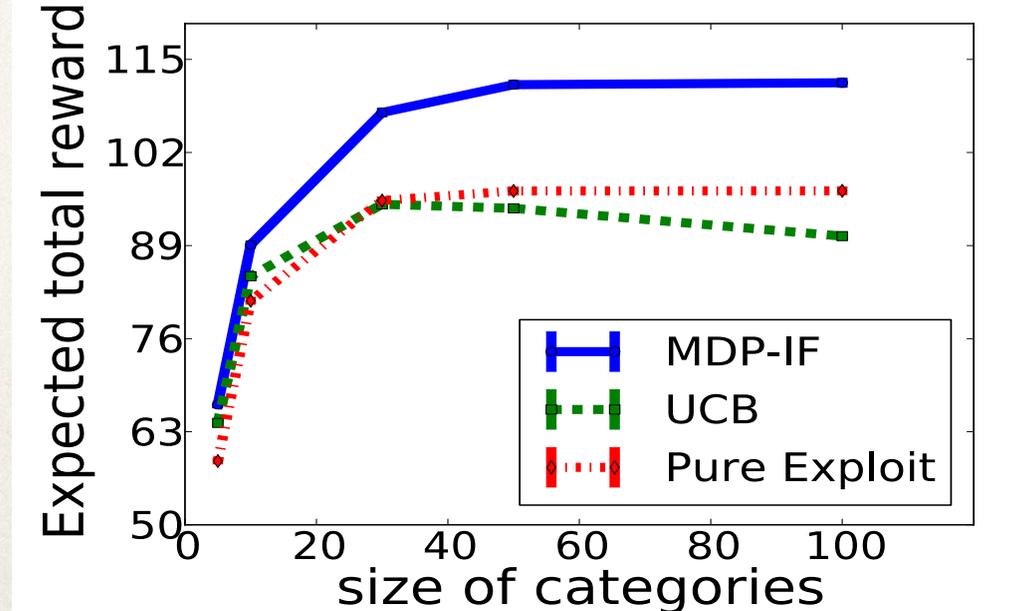

# This method is optimal in special cases, but not in general.

---

- ❖ This algorithm **is not optimal** in general, but we obtain a tractable upper bound on the optimal policy's value.
- ❖ If we model the user as knowing his own  $c$ , and looking at items from top to bottom, stopping immediately before the first item with  $v^*(m, \alpha_{nx}, \beta_{nx}) < c$ , then this algorithm **is optimal**.
- ❖ If  $M_n=1$ , and all categories always have at least one item available, this algorithm **is optimal**, and is equivalent to the Gittins index policy for multi-armed bandits.



# Conclusion

---

- ❖ We presented an information filtering problem arising in the design of a recommender system for arXiv.org
  - ❖ We started with a simple model with a known unit forwarding cost.
  - ❖ We extended this model to unknown cost for the user's time, provided a tractable upper bound and an index-based heuristic policy.
- ❖ We are in the process of testing this system, and rolling it out to users of the arXiv.



Thank you for your attention!

---



# Slides to support Q&A

---




# We have considered several categorization methods

---



- ❖ **Categorization Method 1: Use labels provided by authors:** e.g., Statistics Theory; Optimization and Control; Probability; Group Theory; Classical Analysis and ODEs; Artificial Intelligence; Computation and Language; Computational Complexity; Computational Engineering, Finance, and Science; Computational Geometry; Computer Science and Game Theory; Computer Vision and Pattern Recognition; ...
- ❖ **Categorization Method 2: Compute vector representations of documents from the words in them (e.g., using TF-IDF, or word2vec), and cluster these vectors directly using k-means.**
- ❖ **Categorization Method 3: Use categories learned from Content-Augmented Stochastic Blockmodels [Cashore et al. 2014].**



We now take the categorizer as given, and move on to the information filtering algorithm.

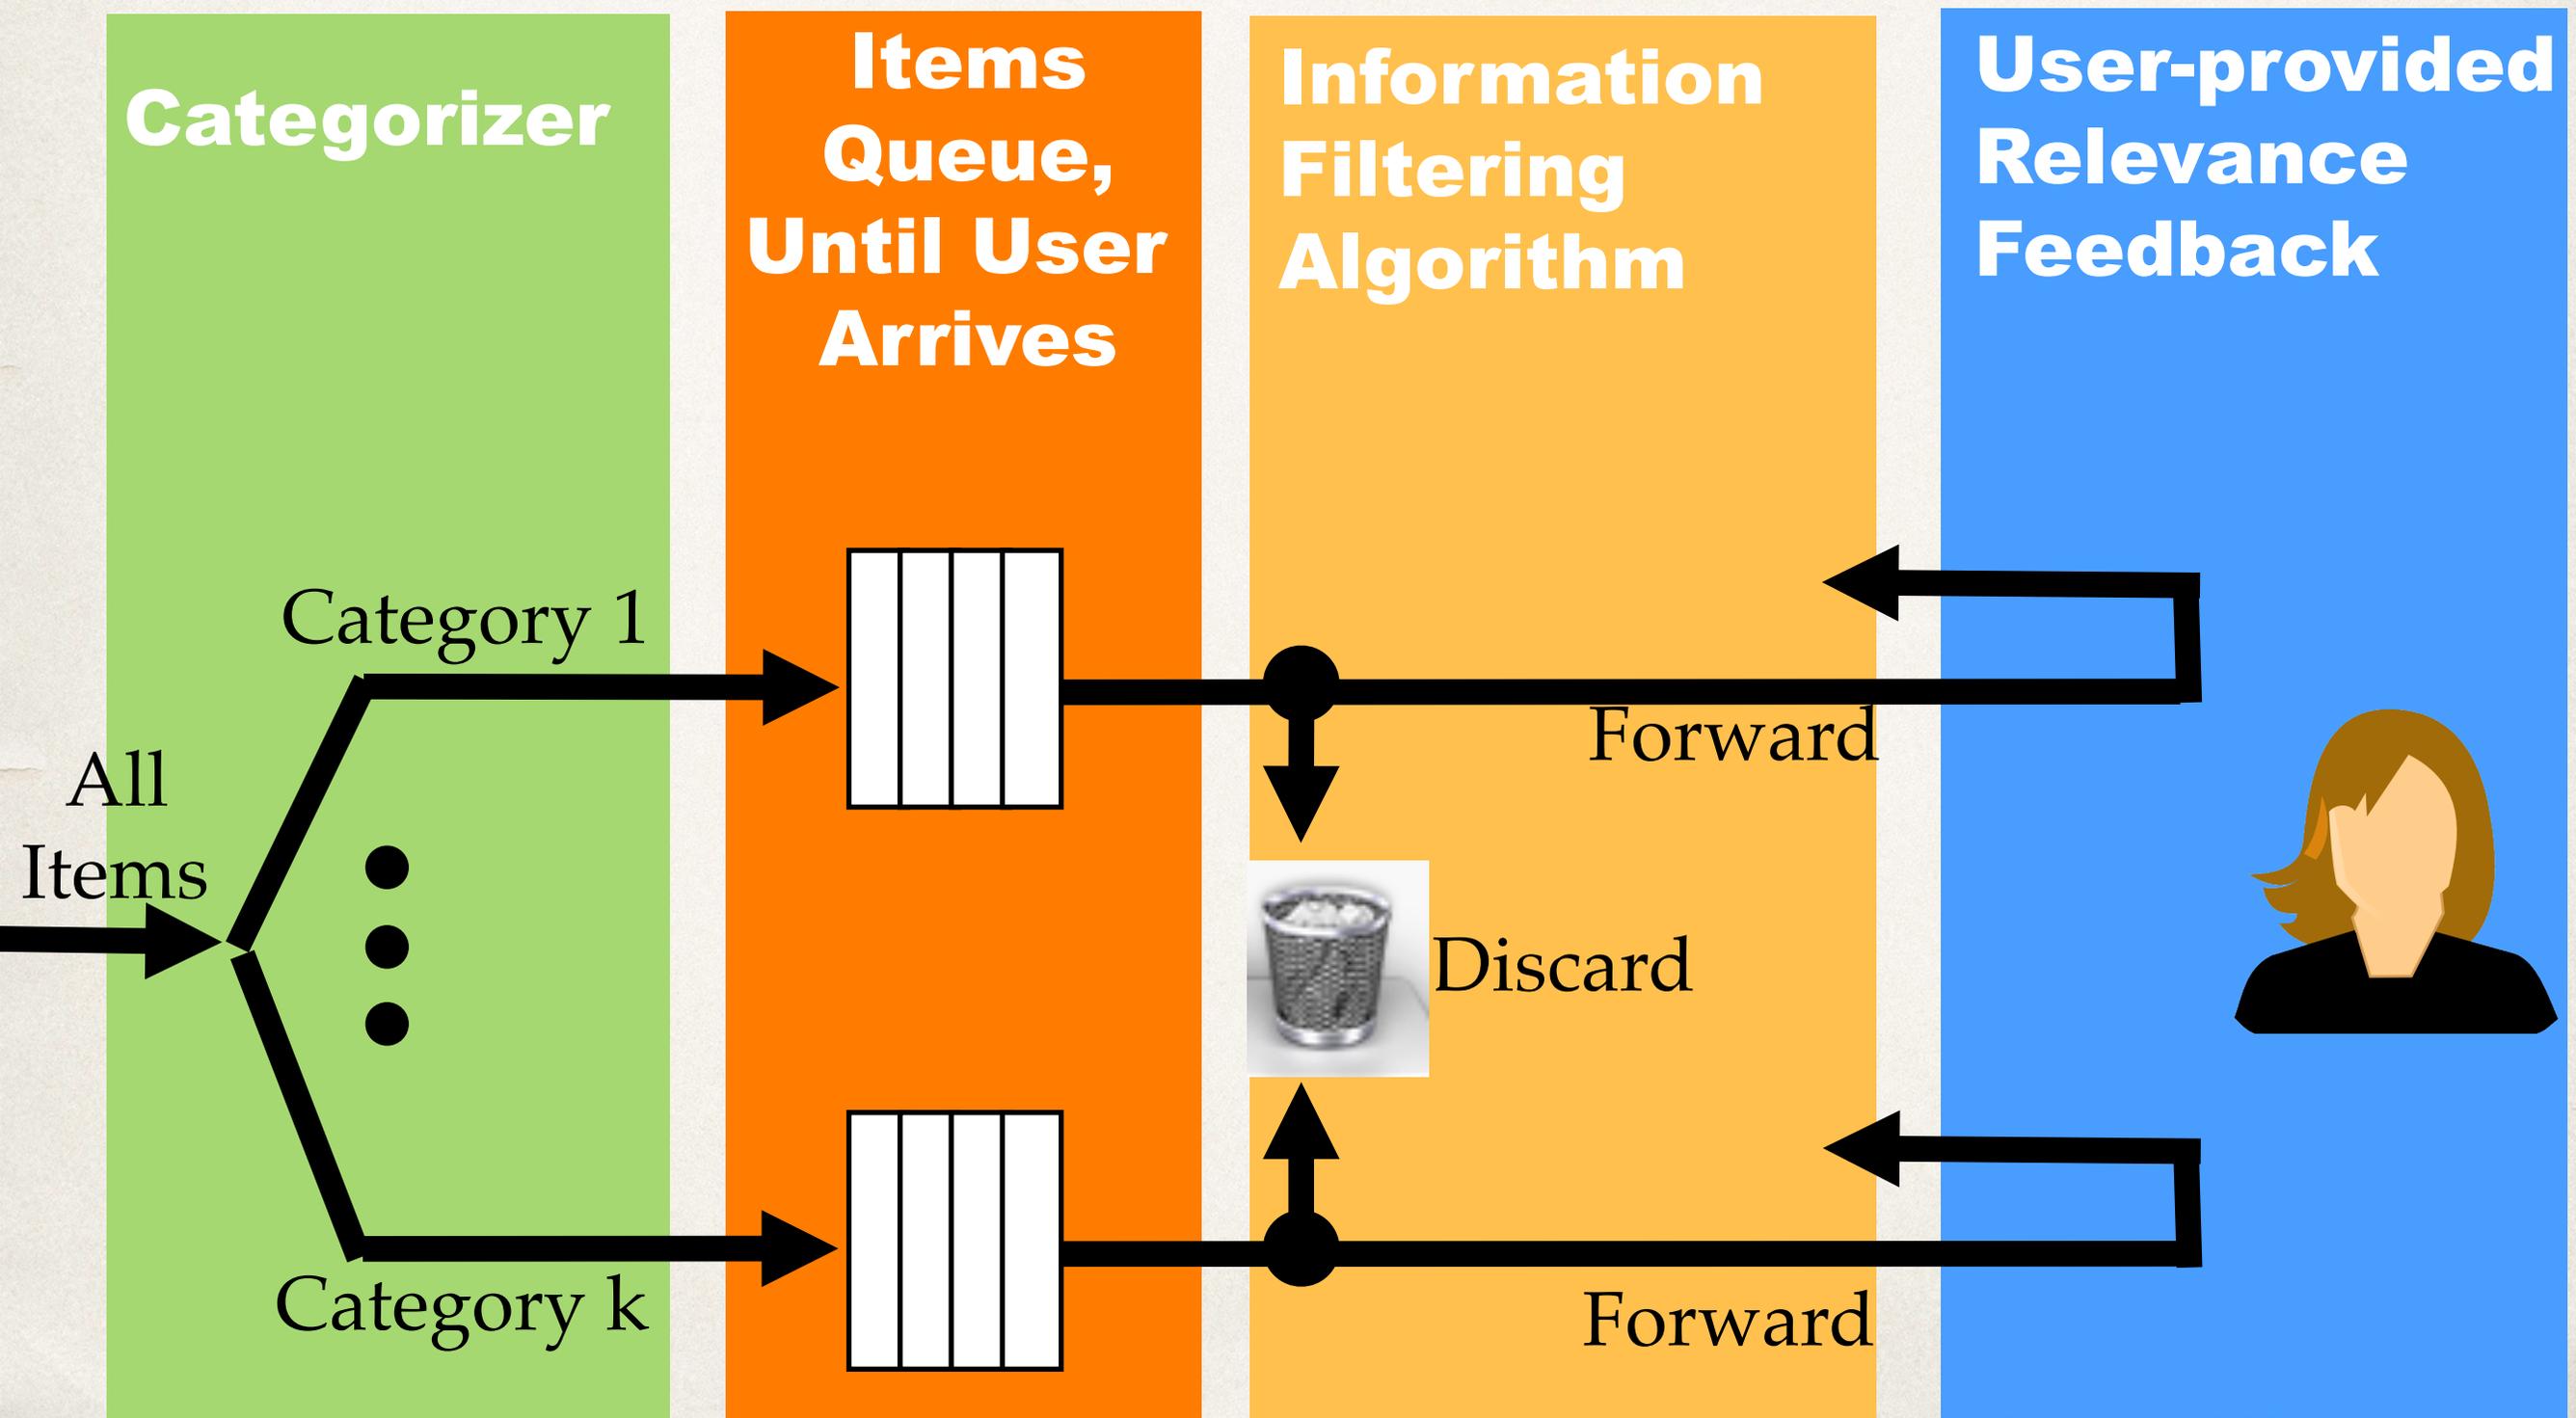

# MDP-IF policy:

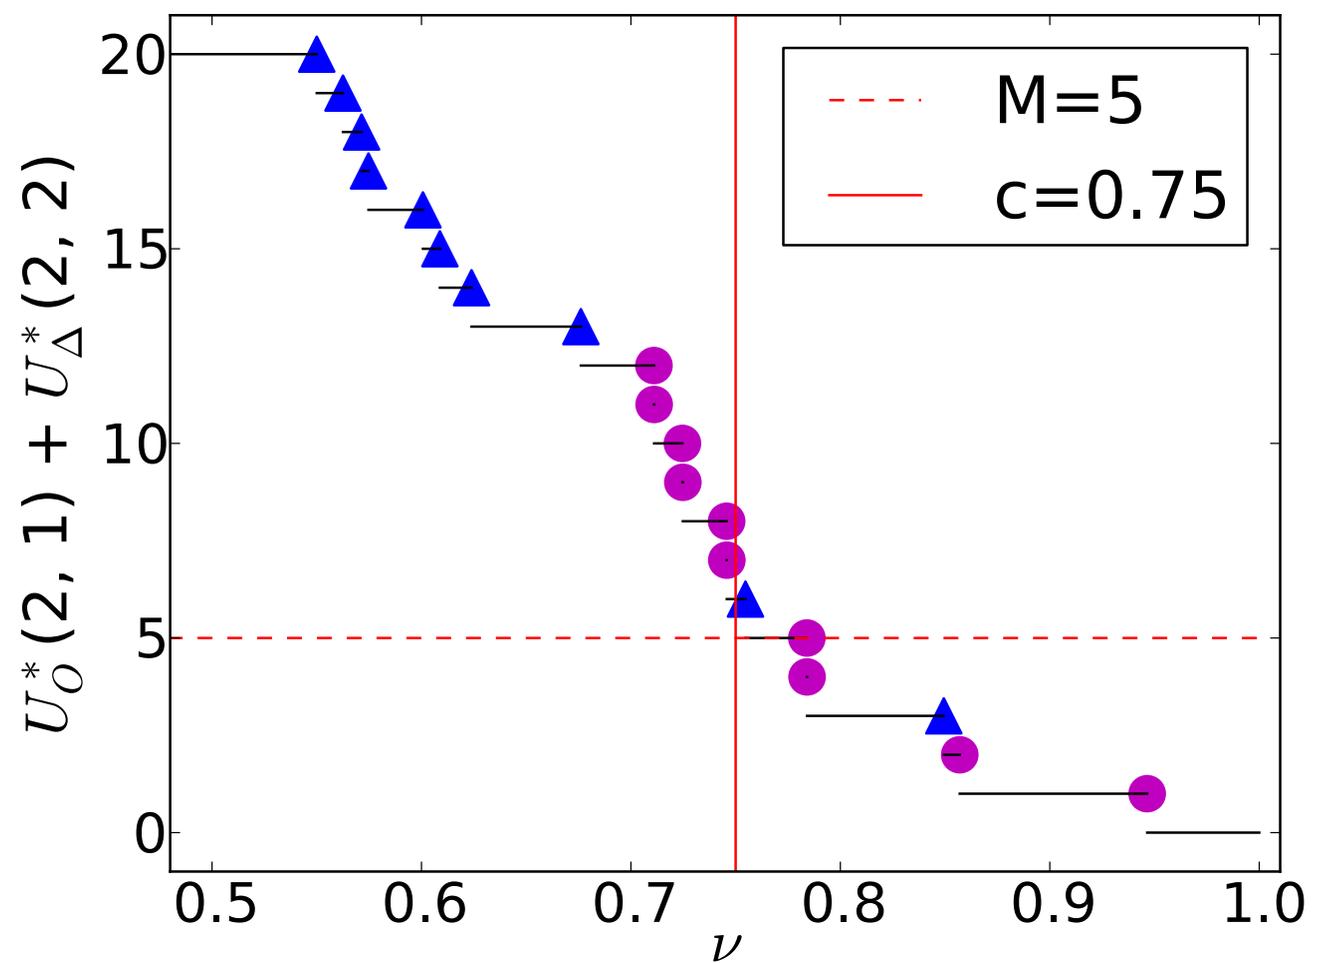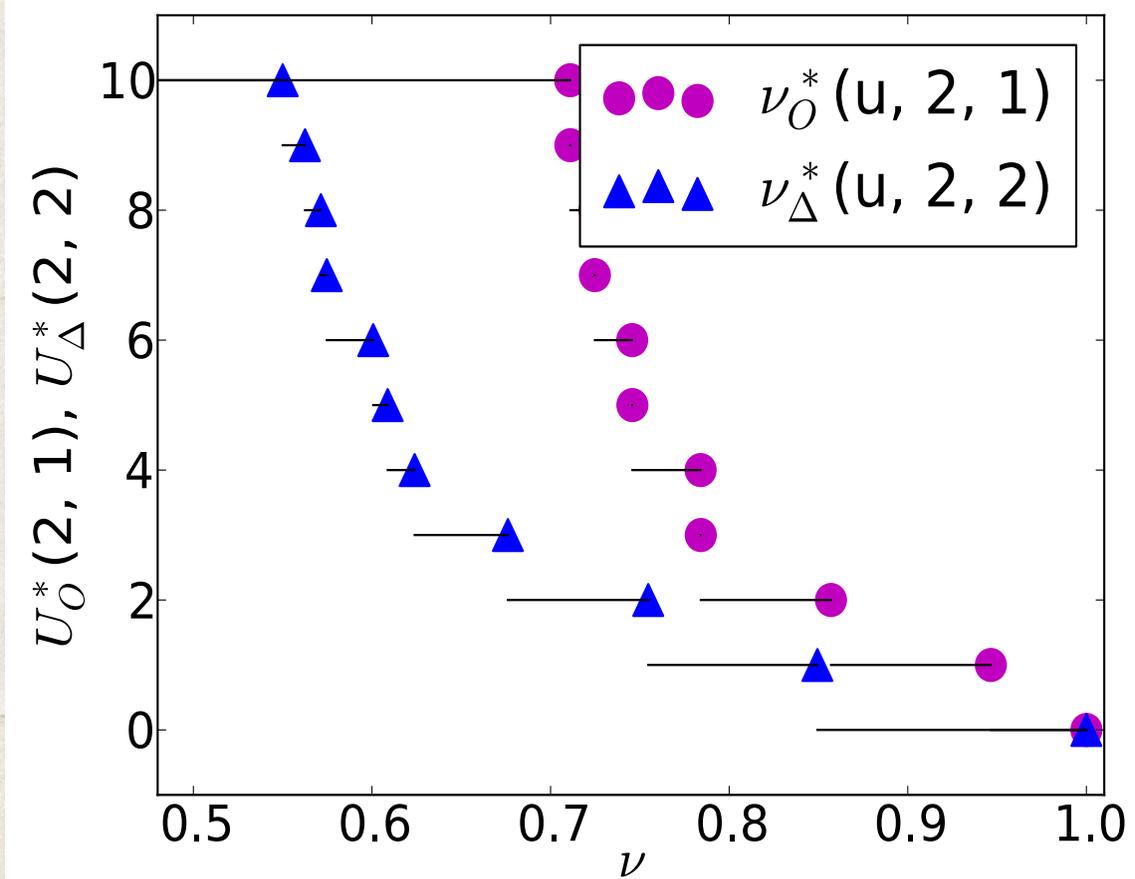


We are interested in

# exploration vs. exploitation

in information filtering

- ❖ More generally, suppose there is an item type with little historical data from this user.
- ❖ This can arise because:
  - ❖ this is a new user;
  - ❖ the item mix is changing;
  - ❖ the information filtering alg. has not forwarded items of this type.

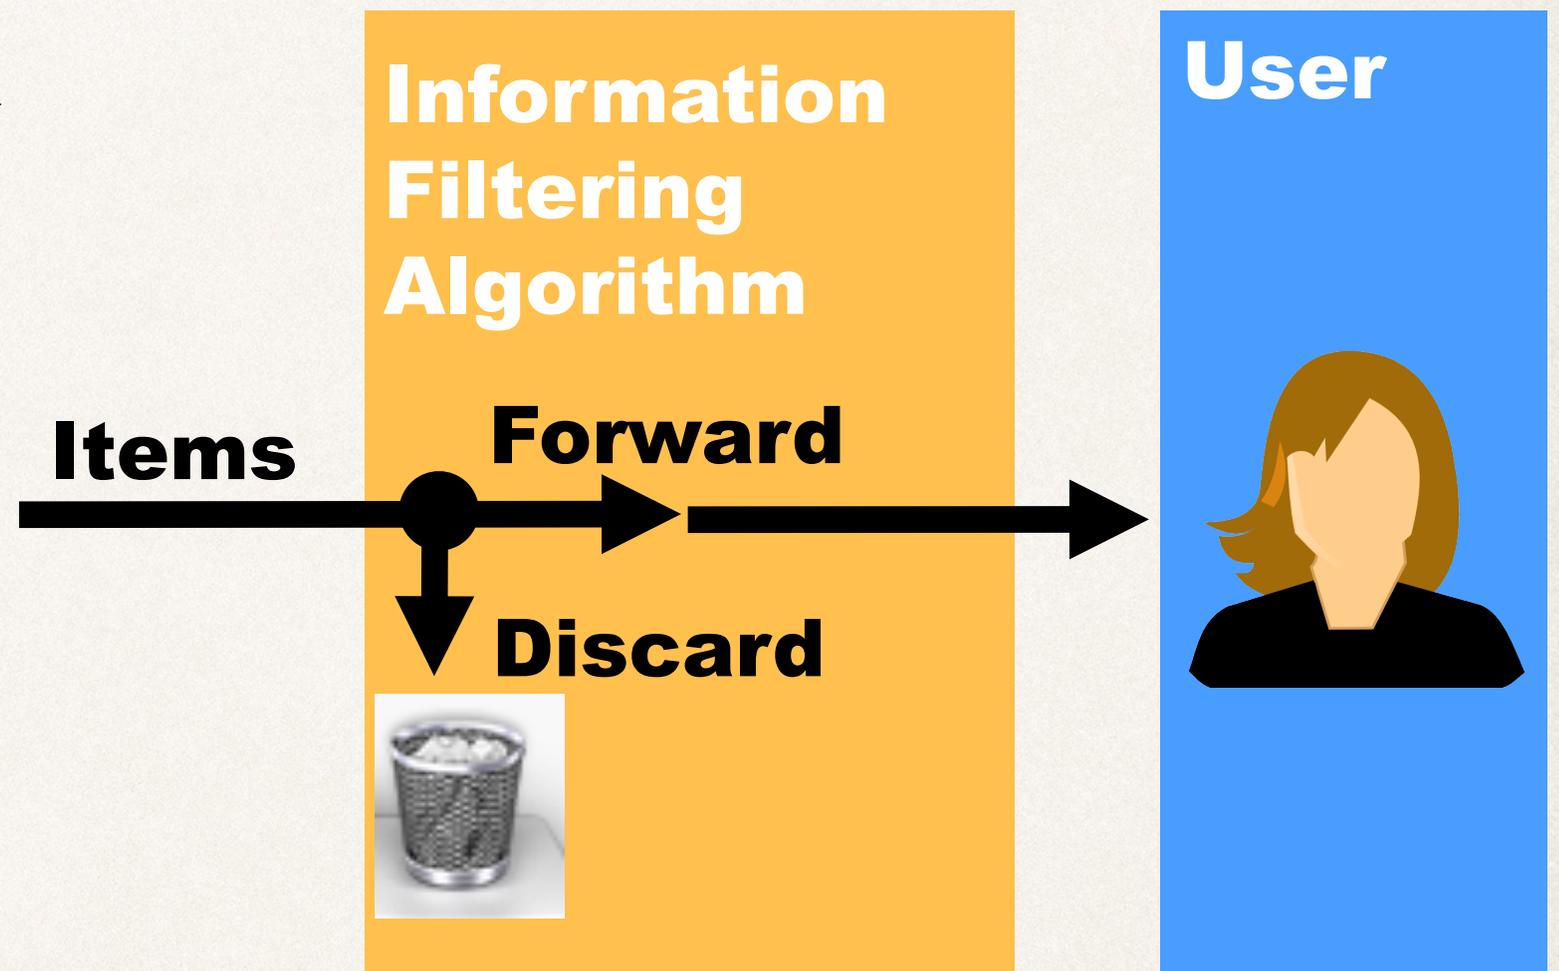

- ❖ We may **EXPLORE**, i.e., forward a few items of this type, to better learn this type's relevance.
- ❖ But, we may want to **EXPLOIT** what little training data we have, which may suggest this item type is irrelevant.
- ❖ What should we do?